

### Tehničke karakteristike

Features	8DI, 24VDC	16DI, 24VDC	32DI, 24VDC
Order No.	CTH2 221-1BF32	CTH2 221-1BH32	CTH2 221-1BL32
<b>Physical Features</b>			
Dimension (W×H×D)	46 × 96 × 62mm	71.3 × 96 × 62mm	138 × 96 × 62mm
<b>Power loss</b>			
Power loss	2W	3W	3W
+5VDC Current consumption	57mA	79mA	179mA
<b>Input Features</b>			
Input	8DI	16DI	32DI
Input type	Sink/ Source		
<b>Voltage input</b>			
Rated voltage	24VDC		
Voltage input	30VDC		
Surge voltage	35VDC, 0.5s		
Logical 1 Signal	15~30V		
Logical 0 Signal	0~5V		
<b>Isolation</b>			
Optical isolation	500VAC, last 1 minute		
Isolated points per group	4	4	8
Input delay	4.5ms		
Max. leak current	1mA AC		
<b>Maximum cable length</b>			
Unshielded	300m		
Shielded	500m		
<b>Simultaneous input</b>			
40°C	8	16	32
50°C	8	16	32

## Dimenzije

型号	单位mm
CTH2 221-1BF32	
CTH2 222-1BF32	
CTH2 222-1HF32	
CTH2 223-1BF32	
CTH2 223-1HF32	
CTH2 232-0HB32	

正立面

侧立面

型号		单位mm
CTH2 221-1BH32	CTH2 231-7PD32	
CTH2 222-1BH32	CTH2 231-7PF32	
CTH2 222-1HH32	CTH2 231-7TF32	
CTH2 223-1BH32	CTH2 231-7TD32	
CTH2 223-1PH32	CTH2 231-7ND32	
CTH2 231-0HC32	CTH2 231-7NF32	
CTH2 235-0KD32	CTH2 231-7WA32	
CTH2 231-0HF32	CTH2 232-0HD32	
CTH2 231-7HB32	CTH2 277-0AA32	
CTH2 231-7HC32	CTH2 277-0AB32	
CTH2 231-7PB32	CTH2 253-1BH32	
CTH2 231-7PC32		


**型号** 单位mm

CTH200 H224	
CTH200 H224X	
CTH2 221-1BL32	
CTH2 222-1BL32	
CTH2 223-1BL32	
CTH2 223-1PL32	


**正立面**

**侧立面**


CTH2 221-1BF接线图

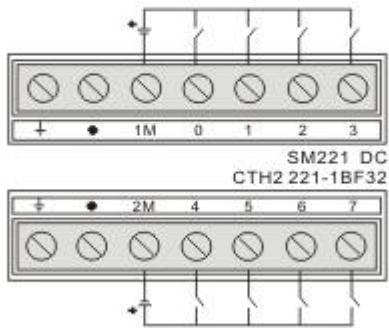

CTH2 221-1BH接线图

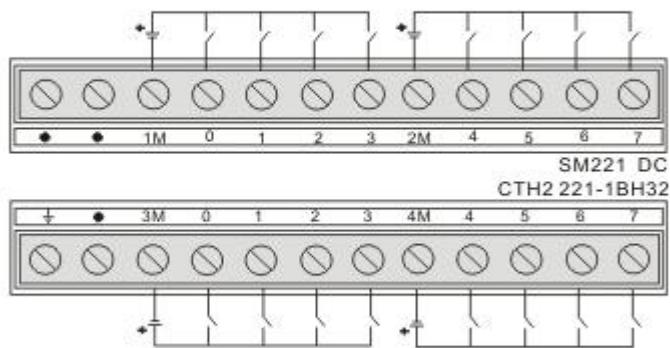

CTH2 221-1BH接线图

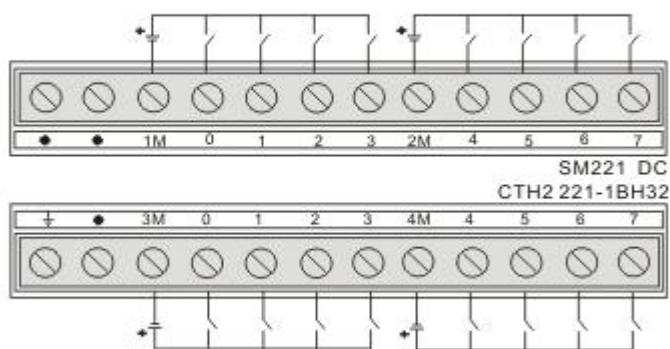

CTH2 221-1BF接线图

